Advantech WebAccess 8.0

Browser-based HMI/SCADA Software



Features

- Remote engineering and support with WebAccess Cloud Architecture
- Business Intelligence Dashboard cross-browser, cross-platform WebAccess HMI based on HTML5
- Open Interfaces Web Services, Widget Interfaces and WebAccess APIs
- Excel Report integration for report format customization
- Multi-touch gesture support
- Google Maps and GPS location tracking integration
- WebAccess Express- The auto-configuration tool for various devices
- Distributed SCADA architecture with central database server and Multi-layer inter-operable SCADA nodes
- Support ample drivers, including Advantech I/O, controllers and major PLCs.
- Redundant SCADA, ports and devices High availability
- · Web-enabled video, audio and animation in WebAccess View
- Open data connectivity by providing industrial protocol and ODBC integration
- Advanced SCADA Function: Alarm, Schedule and Real-time database

Introduction

Advantech WebAccess is a web browser-based software package for human-machine interfaces (HMI) and supervisory control and data acquisition (SCADA). All the features found in conventional HMI and SCADA software including Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in an standard web browser. WebAccess is built around the latest internet technologies. The basic components are:

- 1. SCADA Node: it communicates in real-time with automation equipment and controls the equipment via serial, Ethernet or proprietary communication via multiple built-in device drivers. Not only does it run local controls and monitoring, but also provides real-time data to all remote clients.
- 2. Project Node: it is the development platform for WebAccess and is a web server for all clients to connect to the development project or remotely monitor and control the system. All system configuration, project database files and graphics are stored here.
- 3. Client node: through the ActiveX control inside Microsoft Internet Explorer, it monitors and controls the SCADA Node. The client connects to the Project Node and get the address of the SCADA Node, then communicates directly with the SCADA Node using proprietary communications over a TCP/IP connection. Data is displayed in real-time with dynamically animated graphics along with real-time, historical trending and alarm information. Users can acknowledge alarms and change set-points, status and other data.
- 4. Mobile Client: the Mobile Client interface is intended for use with smart mobile devices, such as iOS, Android; and Windows mobile devices. In the mobile client users can browse graphics, data-log trends, and tag information in real-time. Set value to tag or acknowledge alarms can also be supported via an intuitive interface.

WebAccess 8.0 releases a new generation of WebAccess HMI. Business Intelligence Dashboard, provides users with cross-platform, cross-browser data analysis and user interface based on HTML5 technology. WebAccess 8.0 can also act as an IoT Platform by providing open interfaces for partners to develop IoT applications for different vertical markets.

Feature Details

WebAccess Cloud Architecture

WebAccess is a 100% web based HMI and SCADA software with private cloud software architecture. WebAccess can provide large equipment vendors, SIs, and Enterprises to access and manipulate centralized data and to configure, change/update, or monitor their equipment, projects, and systems all over the world using a standard web browser. Also, all the engineering works, such as: database configuration, graphics drawing and system management and the troubleshooting can be operated remotely. This can significantly increase the efficiency of maintenance operations and reduce maintenance costs.

Business Intelligence Dashboard

WebAccess 8.0 provides an HTML5 based Dashboard as the next generation of WebAccess HMI. System integrators can use Dashboard Editor to create the customized information page by using analysis charts and diagrams which are called widgets. Ample widgets have been included in the built-in widget library, such as trends, bars, alarm summary, maps...etc. After the dashboard screens have been created, end user can view the data by Dashboard Viewer in different platforms, like Explorer, Safari, Chrome, and Firefox for a seamless viewing experience across PCs, Macs, tablets and smartphones.

Open Interfaces

WebAccess opens three kinds of interfaces for different use. First, WebAccess provides a Web Service interface for partners to integrate WebAccess data into APPs or application system. Second, a pluggable widget interface has been opened for programmer to develop their widget and run on WebAccess Dashboard. Last, WebAccess API, a DLL interface for programmer to access WebAccess platform and develop Windows applications. With these interfaces, WebAccess can act as an IoT platform for partners to develop IoT applications in various vertical markets.

Excel Reporting

WebAccess provides Excel Reports for fulfilling the requirements of self-defined report functionality. Users can build self-defined Excel templates and generate daily/ weekly/ monthly/yearly or on demand reports automatically in Microsoft EXCEL format. The Excel Report function is also web-based. Excel reports can be generated and viewed in a Web browser from wherever is needed.


Multi-touch Gesture Support

WebAccess supports multi-touch functionality with various pre-set gestures, such as flick to change pages, zooming in and out of the display and 2-handed operation maximizing operating safety, increasing usability and decreasing training time due to the more intuitive handling. In addition, multi-touch also supports multi-finger tap, multi-finger grab, and multi-finger spread gestures to operate pre-defined actions.

Google Maps and GPS Tracking Integration

WebAccess integrates real-time data on each geographical site with Google Maps and GPS location tracking. For remote monitoring, users can intuitively view the current energy consumption on each building, production rate on each field or traffic flow on the highway together with alarm status. By right-clicking on Google Maps or entering the coordinate of the target, users can create a marker for the target and associate the real-time data of three sites with a display label. Furthermore, this function also integrates with GPS modules to track the location of the marker in Google Maps and allows it to be used in vehicle systems.

Advantech WebAccess

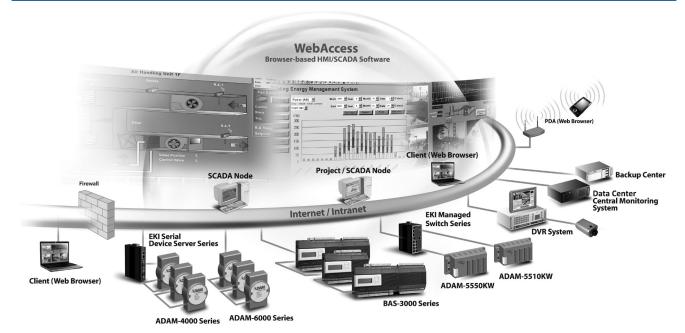

WebAccess Express - The Auto-Configuration Tool

Advantech WebAccess Express is an automated graphical remote control application program with 1-click to bring device information online. It automatically discovers the ADAM and EKI modules on the network and serial ports, generates a database and brings real-time data online with prebuilt monitoring graphics. Express also provides remote monitoring functions and allows users to communicate and exchange data with SNMP, DiagAnywhere Server or SUSI 4.0 APIs and then check the health of the CPU, memory, temperature, and voltage of the target machine as device monitoring platform. With SNMP, DiagAnywhere, or SUSI API Driver integration, users can configure the alarm function if any abnormal or suspicious data is detected in WebAccess.

Distributed SCADA Architecture with Central Database Server

SCADA nodes run independent of any other node. Each SCADA node communicates to automation equipment using communication drivers supplied with Advantech WebAccess. The Project Node is a centralized database server of configuration data. A copy of the database and graphics of all SCADA nodes is kept on the Project Node. The historical data is also stored in the database in project node.

Ample Driver Support

WebAccess supports hundreds of devices. In addition to Advantech I/Os and controllers, WebAccess also supports all major PLCs, controllers and I/Os, like Allen Bradley, Siemens, LonWorks, Mitsubushi, Beckhoff, Yokogawa etc. WebAccess can easily integrate all devices in one SCADA. All of these device drivers are integrated into WebAccess and free of charge. For a complete list of WebAccess drivers, refer to webaccess.advantech.com.

Redundant SCADA, COM Ports and Devices

Advantech WebAccess assures continuous, reliable communication to automation equipment. WebAccess Backup node activates when the primary node is down. WebAccess device drivers communicate with backup ports or devices if the primary connection is lost and automatically restores to the primary item when it becomes available.

Alarm Management System

WebAccess advanced Alarm Management System (AMS) delivers alarm messages via SMS, email or audio announcement to multiple receivers by predefined alarm group, user groups, time schedule and priority setting.

Web-enabled Video, Audio, Animation

WebAccess allows operators and users to monitor equipment and facilities directly using web-enabled full-motion video cameras, audio, and web cams. It also supports the use of live video cameras that are IP-enabled via ActiveX control, Windows Media Player, JPEG and other formats supported by Microsoft Internet Explorer 8.0 (or later). The video image appears in the same display area as graphics, animation, alarms and trends displays. With vector-based graphics, WebAccess graphics can be built at any resolution and displayed at any resolution. It also has the options to allow users to define the aspect ratio, 16-9, 16:10 or 4:3, to view their graphics to avoid distortion when displaying in certain aspect ratio display.

Open Data Connectivity

Advantech WebAccess exchanges online data with 3rd party software in real-time by supporting OPC UA/DA, DDE, Modbus and BACnet Server/Client. It supports SQL, Oracle, MySQL, and MS Access for offline data sharing.

Real-Time Database

WebAccess Real-Time Database (RTDB) is designed to meet industrial high speed and large quantity data access requirements. With the fully integrated design, users do not need to learn how to operate this database. Just by enabling the usage of RTDB in WebAccess configuration page, WebAccess SCADA node can serve data processing (collect and be retrieved at the same time) at a rate of millions of records per second. Also, the RTDB maintenance feature can automatically archive and delete obsolete data.

Gateway with WebAccess Installed

With open real-time data connectivity and hundreds of device drivers, WebAccess can integrate all devices and a selected hardware platform with pre-installed WebAccess becomes the perfect protocol gateway or data concentrator. With intuitive setup, WebAccess converts field device data to Modbus, OPC DA, OPC UA or BACnet protocol, so other software, such as ERP and MES can gain access without knowing the field device protocol. WebAccess+ Solution Products, a bundle of WebAccess Professional 7.2 and Windows 7 Embedded built in to Advantech's robust hardware platform, can be used as a high performance, low cost data gateway solution.

WebAccess Scheduler

WebAccess Scheduler provides on/off control and setpoint changes based on the time-ofday, day of the week and the calendar. Users can control lights, temperature and equipment for saving energy during work days. WebAccess Scheduler allows the definition of up to 17 periods per day and preserved functions for setpoints.

Browser-based HMI/SCADA Software

Software Specifications

Advantech WebAccess Professional

I/O Tag Number 75/150/300/600/1500/5000/20K/64K 75/150/300/600/1500/5000/20K/64K Internal Tag Number

Web Client 1024 **Alarm Logs** 5000 **Action Logs** 5000

Graphics

Number of Graphic Pages Unlimited (limited by H/D size) Variables per Graphic Pages 4000

Tag Source Global Multi-touch Gesture

Dashboard

 Cross Browser and Platform Yes Number of Built-in Widget 37 Open Widget Interface Yes

Group Trend Log

 Number of data logging Number of IO tags license x 2

Alarm Groups per SCADA

Receipt

- Recipes per Project Unlimited (limited by H/D size)

Unit per Recipe 999 Item per Unit

Scheduler

Holiday Configuration Group 9999 9999 Time Zone Group **Device Loop Group** 9999 **Equipment Group** 9999 Scheduler Reservation Group 9999

Web-enabled Integration

Google Maps and GPS Location Tracking Yes

Open Connectivity

Modbus Server Yes **BACnet Server** Yes **ODBC** and **SQL** Query Yes OPC DA/UA Server Yes **DDE Server** Yes

Others

Centralized logs on project Yes node via ODBC SCADA Redundancy Yes

TclScript/VBScript/JScript Script language

Data Transfer Yes **ODBC** and **SQL** Query Yes Reporting / Excel Reporting Yes **Device Redundancy** Yes Supports IPv6 Yes WebAccess Express Yes

Ordering Information

Professional Versions

WA-P80-U075E WebAccess V8.0 Professional Software with 75 tags WA-P80-U150E WebAccess V8.0 Professional Software with 150 tags WA-P80-U300E WebAccess V8.0 Professional Software with 300 tags WA-P80-U600E WebAccess V8.0 Professional Software with 600 tags WA-P80-U15HE WebAccess V8.0 Professional Software with 1,500 tags WA-P80-U50HE WebAccess V8.0 Professional Software with 5,000 tags WA-P80-U20KE WebAccess V8.0 Professional Software with 20,000 tags WA-P80-U64KE WebAccess V8.0 Professional Software with Unlimited

Version Upgrade*

WA-X80-U000E WebAccess Upgrade to Version 8.0

*Upgrade the WebAccess Version from 7.x to 8.0.

Upgrade*

WA-X80-U075E WebAccess software license, 75 Tags upgrade WA-X80-U300E WebAccess software license, 300 Tags upgrade WA-X80-U600E WebAccess software license, 600 Tags upgrade WA-X80-U15HE WebAccess software license, 1,500 Tags upgrade WA-X80-U50HE WebAccess software license, 5,000 Tags upgrade

* Original serial number from WebAccess Professional version is required to purchase WebAccess upgrade. The serial number can be found on the USB dongle.

WebAccess+ Bundled Products

WA-TPC1771-T600E 17" Touch Panel Computer, 600 tags WebAccess with Traditional Chinese

WA-TPC1771-T50HE 17" Touch Panel Computer, 5,000 tags WebAccess with

Traditional Chinese WA-TPC1771-C600E 17" Touch Panel Computer, 600 tags WebAccess with

Simplified Chinese WA-TPC1771-C50HE

17" Touch Panel Computer, 5,000 tags WebAccess with Simplified Chinese WA-TPC1771-E600E 17" Touch Panel Computer, 600 tags WebAccess with

WA-TPC1771-E50HE 17" Touch Panel Computer, 5,000 tags WebAccess with

English WA-UN02178-T600E

Automation Computer, 600 tags WebAccess with Traditional Chinese

WA-UN02178-T50HE Automation Computer, 5,000 tags WebAccess with

Traditional Chinese

WA-UN02178-C600E Automation Computer, 600 tags WebAccess with Simplified Chinese WA-UN02178-C50HE Automation Computer, 5,000 tags WebAccess with

Simplified Chinese WA-UN02178-E600E Automation Computer, 600 tags WebAccess with

WA-UN02178-E50HE

Automation Computer, 5,000 tags WebAccess with English

Minimum Requirements

Project Node \ SCADA Node

 Operating System Windows XP (SCADA Node Only), Windows 7 SP1,

Windows 8 Professional, Windows Server 2008 R2 or

Hardware Intel Atom or Celeron. Dual Core processors or higher

recommended

2GB RAM minimum, more recommended

30GB or more free disk space

 Display Resolution 1024 x 768 or higher (recommended)

Lower resolutions also supported USB port for License Hardkey on SCADA node

USB Port

Software .Net Framework 4.5 or later version

Dashboard Viewer

Hardware PC: Intel Core I3 or higher: 4GB RAM or higher

iPhone: iPhone 5 or later version

Android: 1.5GHz Quad Core or higher; 2GB RAM or

higher

Windows Phone: 1.5GHz Quad Core or higher; 2GB

RAM or higher

Browser **Internet Explorer**: IE 9 or later version

Chrome: Version 37 or later version Firefox: Version 31 or later version Safari: Version 7 or later version