

IPC-622

6U 20-slot Rackmount Chassis with Hot-swap Redundant Power Supply



Features

- 6U-high 20-slot rackmount chassis
- Hot-swap redundant power supply
- Fault detection/alarm notification
- Four filter 49-CFM cooling fans
- Up to four systems in a chassis

Introduction


The IPC-622 is a high-end 20-slot, 19" rackmount industrial computer chassis with a 300-watt hot-swappable redundant power supply. Up to six disk drives can be installed into the IPC-622. This unit supports up to four front accessible, half-height storage devices. The IPC-622 can support up to four PC systems in a single chassis suitable for space-critical applications. Moreover, the IPC-622 features an advanced fault detection

and alarm notification feature. The IPC-622 monitors its own hardware status including power failure, fan failure and temperature. When malfunctions occur, an audible alarm will be activated to alert users of maintenance needs. Problems can be clearly identified through the IPC-622's front panel LED.

Specifications

		Front-accessible	Internal
Drive Bay	3.5"		2
	5.25"	4	
Cooling	Fan	4 (49 CFM/each)	
	Air Filter	Yes	
Miscellaneous	Hold-down Clamp	Rubber-buffered hold-down clamp	
Physical	Dimensions (W x H x D)	483 x 266 x 462 mm (19" x 10.5" x 18")	
	Weight	30 Kg (66 lb)	

Max. 20-slot backplane




Four 49-CFM cooling fans
Manually replaceable fan filter



Power LED

Power status



FAN LED

TEMP LED


HDD LED

Rear side hole for heat-releasing

Hot-swap redundant power supply



Dimension Diagram

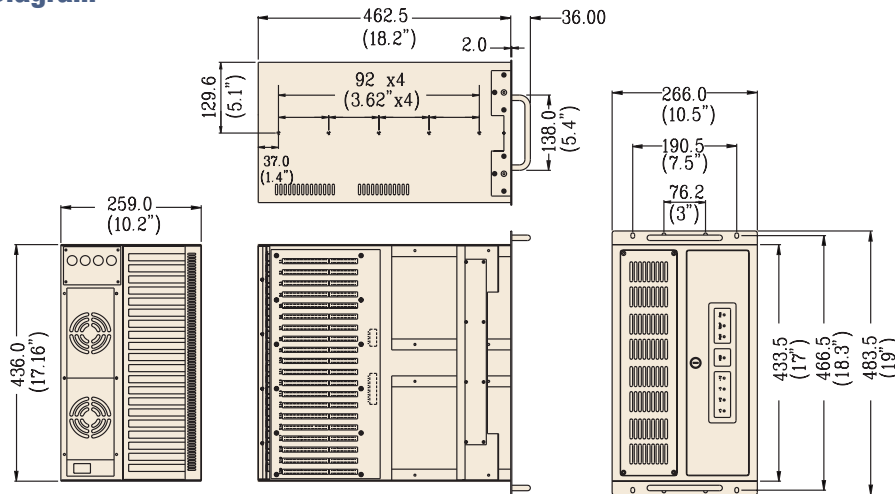

Unit: mm (inch)

Passive Backplane Options

B/P Model Name	Slot	Segment
PCA-6120-0B1	20 ISA	Single
PCA-6120P4-0B1	14 ISA, 4 PCI, 2 PICMG	Single
PCA-6119P7-0B1	10 ISA, 7 PCI, 2 PICMG/PCI	Single
PCA-6120P12-0A1	7 ISA, 11 PCI, 1 PICMG/PCI, 1 PICMG	Single
PCA-6119P17-0B1	16 PCI, 1 PICMG/PCI, 1 PICMG	Single
PCA-6120D-0B1	20 ISA	Dual
PCA-6120DP4-0B1	14 ISA, 4 PCI, 2 PICMG	Dual
PCA-6118DP7-0B1	1 ISA, 14 PCI, 3 PICMG	Dual
PCA-6120Q-0B1	20 ISA	Quad
PCA-6116QP2-0B1	1 ISA, 8 PCI, 7 PICMG	Quad

Storage Device Options

Part Number	Descriptions
SCD-COM	Slim-type CD-ROM kit with 40-pin IDE connector
SCD-FDD-COMBO	Storage kit with slim 24X CD-ROM and standard 3.5" black FDD
9684000014	3.5" FDD with black bezel

Special Cable Options

Part Number	Descriptions
1701400971	HDD cable, ATA 33, 62 cm + 35 cm
1701400973	HDD cable, ATA 66/100, 62 cm + 35 cm

Power Supply Options

Part Number	Specifications					
	Watt	Input	Output	Mini-load	Safety	MTBF
RPS-300	300 W AT	AC 115/230 V (selectable)	+5 V @ 30 A +12 V @ 12 A -5 V @ 0.5 A -12 V @ 0.5 A	+5 V @ 3 A +12 V @ 1 A	UL/CE/TÜV/CSA	100,000 hours @ 25 °C
RPS-300DC48	300 W AT	DC -38 ~ -58 V	+5 V @ 25 A +12 V @ 10 A -5 V @ 1 A -12 V @ 4 A	+5 V @ 2 A	--	100,000 hours @ 25 °C
RPS-400H-Z	400 W ATX. PFC	AC 90 ~ 264 V (Full-range)	+5 V @ 42 A +3.3 V @ 20 A +12 V @ 14 A -5 V @ 1 A -12 V @ 1 A +5 Vsb @ 0.75 A	+5 V @ 2 A +3.3 V @ 0.2 A +12 V @ 0.5 A	UL/cUL/TÜV/CE	100,000 hours @ 25 °C (75% load)
1757240013	400 W ATX. PFC	AC 90 ~ 264 V (Full-range)	+5 V @ 42 A +3.3 V @ 20 A +12 V @ 14 A -12 V @ 1 A -5 V @ 1 A +5 Vsb @ 0.75 A	+5 V @ 2 A +12 V @ 0.5 A +3.3 V @ 0.2 A	UL/cUL/TÜV	100,000 hours @ 25 °C (75% load)

Ordering Information

Part Number	With Power Supply	With Backplane	Regulation
IPC-622BP-40Z	1757240013 (single P/S)	--	UL, cUL, CE
IPC-622-300R-01	RPS-300	--	CE
IPC-622-30RD-01	RPS-300DC48	--	CE
IPC-622BP-400R	RPS-400H	--	UL, cUL, CE
IPC-622BP-40RZ	RPS-400H-Z	--	UL, cUL, CE
IPC-622-300R	RPS-300	PCA-6120-0B1	CE
IPC-622P4-300R	RPS-300	PCA-6120P4-0B1	CE
Black Color Chassis Options			
IPC-622BP-00RB	Without power supply	--	None
IPC-622BP-300RB	RPS-300	--	CE
IPC-622BP-40RZB	RPS-400H-Z	--	UL, cUL, CE

CompactPCI Enclosures 1

CompactPCI Boards 2

CompactPCI Peripherals 3

Blade Servers 4

Network Appliances 5

e-Server Systems 6

Storage Subsystems 7

Industrial Computer Chassis 8

Full-sized CPU Cards 9

Passive Backplanes 10

Industrial Computer Peripherals 11