# AIMB-C300

### Multifuntion Chassis for EmbATX Motherboard



#### **Features**

- For EmbeddedATX series motherboard
- P4 CPU up to 2.8 GHz
- Dimension: 383 x 362 x 90.9 mm
- 1-slot PCI riser card
- Supports 1 x slim CD
- Supports 1 x FDD or 7 in 1 card reader
- Supports two 3.5" Hard
- Supports small module display converts (PCM-3540R, PCM-3526, PCM-261..)
- 200 W ATX Power supply
- Key lock; Air Filter (Optional)
- Vertical, Parall wall mount tool (Optional)

# **CEFCC**

## **LVDS Extends Capabilities**

The AIMB-C300 multiplex chassis is ideal for POS, ATM, Kiosks and general purpose solutions. This platform is designed for enterprise customers using mission critical applications with space limitations.

The chassis comes with 200W ATX PFC power supply, two efficient cooling fans, front end-accessible air filter, dual USB, system reset and system power switch. The viewable LED indicators on front door show the system status. Other features include one-slot PCI riser card, 2 ports USB cables, expansion for one FDD, two 3.5" hard disks and small module display converter.

## **Specifications**

**Expansion Driver Bay** 2 x 3.5" hard disks, 1 slim CD, 1 FDD or Card Reader

Small Module
Button
Supports small display modules
Power Switch Button, Reset Button

FrontPCI slotPCI Riser Card


LED
1 Green LED light (Power on) 1 Yellow LED Light (HDD)


active)

• Wall Mount Tool For Vertical/Horizontal (optional)

Cable kits
I/O panel
Blank (default)
4 COMs (optional)


• **Dimensions (W x H x D)** 365.4 mm x 90.9 mm x 383.3 mm (14.3" x 3.5" x 15")









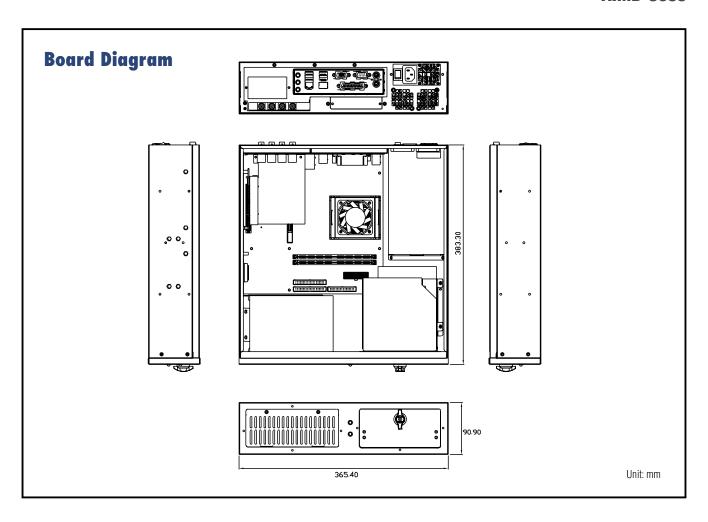

## **Packing List**

1 x User's manual

# **Ordering Information**

#### **Standard**

- AIMB-C300-0000 Multifuntion Chassis For EmbATX Motherboard

#### **Optional Accessories**

**9692622400** 3.5" FDD 1.44MB - 9686000089 Slim CD Convert Board **1990610040** Cushion x 3 **1750000073** P4 CPU Fan **1960002165** Wall mount vertical x 2 Wall mount Parallel x 2 **1960002167** 

Slim CD **9689000243** 

**9680001038** Card reader with cable I/O 4 x COM Cover **1960002170**