

# MIC-3390

## 6U CompactPCI® Low Power Intel® Pentium® M Processor Board with PCIe Dual GbE/DDR2/SATA/PMC



### Features

- Low-power Intel® Pentium® M processor with speeds of up to 2.0 GHz and above, u-FCPGA package Socket 479 with u-FCPGA package design
- PCI Express Dual Gigabit Ethernet on board
- Dual channel DDR2 400/533 MHz SDRAM up to 2 GB
- PICMG 2.16 (CompactPCI® Packet Switching Backplane) compliance
- PICMG 2.9 (CompactPCI System Management) (IPMI 2.0) compliance
- PICMG 2.1 (CompactPCI Hot Swap) compliance
- Onboard SATA 2.5" HDD PMC connector and CompactFlash socket

### Introduction

The MIC-3390 Onboard-based single-board computer is designed to offer embedded system builders with the best available value in high-performance Intel Pentium M computing at low power. Using the latest Intel Pentium M processors combined with the Mobile Intel 915GM Express chipset and Intel I/O Controller Hub ICH6M, the MIC-3390 supplies unprecedented performance, connectivity and throughput without compromising system thermal design. The MIC-3390 Graphic Memory Controller Hub, along with the ICH6M, gives an optimized integrated memory, graphics, and I/O solution. The chipset features a low-power design, validated on the MIC-3390 with all Intel Pentium M processors, and supports up to 2 GB of DDR2 system memory at 400/533 MHz on dual-channel SODIMM banks.

The MIC-3390 maximizes on I/O throughput by taking full advantage of the ICH6-M's PCI Express (PCIe) root ports. Two single-lane PCIe links connect the Intel 82573E controllers directly to the root ports, providing bi-directional 2 Gbps peak bandwidth for Gigabit Ethernet support at wire speed. An additional PCIe lane connects to a PCIe-to-PCI-X Bridge to provide a 64-bit/100 MHz data path to the onboard PMC site and a 64-bit/66 MHz data path to the CompactPCI Bridge. The flexibility of the bridge allows the MIC-3390 to be used in a system slot or a peripheral slot as an intelligent I/O processor or as an application blade in a multi-processor or clustered architecture.

In addition to a full array of industry standard I/O features, the Serial ATA Host Controller in the ICH6-M provides two ports for high speed data transfers up to 150 MB/s. One port is routed to rear I/O and the other port is routed to both the onboard 2.5" SATA drive and rear I/O for a greater choice of connectivity. With an optional mezzanine card, the MIC-3390 provides a fully compatible IPMI 2.0 interface with LAN and serial port support for out-of-band management. The MIC-3390 provides a solid, cost-effective foundation for cross-platform management.

The MIC-3390 architecture delivers the performance and high scalability required for today's cutting-edge embedded computing applications. It enables fast deployment of next-generation platforms to maximize competitive advantage while minimizing development risks.

### Specifications

Processor System	CPU	Intel Pentium M Processor (Socket 479)
	Max. Speed	2.0 GHz (2 MB L2 cache)
	Chipset	Intel 915 GM
	BIOS	Award 4 Mb Flash
Bus	Front Side Bus	400/533 MHz
	PCI	Up to 64-bit/100 MHz (PCI-X support)
Memory	Technology	DDR2 400/533 MHz SDRAM
	Max. Capacity	2 GB
	Socket	SODIMM
Graphic	Controller	Integrated in Intel 915GM
	VRAM	Dynamic
	Resolution	Up to 2048 x 1536 64 k color/75 Hz
Ethernet	Interface	10/100/1000Base-TX Gigabit Ethernet
	Controller	Intel 82573E x 2
	I/O Connector	RJ-45 x 2 (front)
Storage	Mode	SATA
	Channels	2
	Storage site	One SATA connector and space reserved for embedded 2.5" HDD
Bridge	Bus	PCI 64-bit/66 MHz
	Interface	Universal (System/Peripheral mode capability)
I/O Interface	Serial (COM1)	RJ-45 x1 (front)
Operating System	Compatibility	Windows® XP/2000/NT 4.0, Red Hat Fedora Core 3
Hardware Monitor	Controller	Winbond W83782D
	Monitor	CPU temperature, +3.3 V/+5 V/+12 V

## Specifications Cont.

Watchdog Timer	Output	Interrupt, system reset, NMI			
	Interval	Programmable, 0 ~ 255 sec.			
PMC	Site	1			
	Interface	PCI Mezzanine (IEEE1386.1 compliant)			
	Signal	+5 V/+3.3 V compliant			
Miscellaneous	Solid State Disk	One CompactFlash socket			
	LED Indicator	HDD, power, hot swap			
	USB (2.0)	2 channels			
	Real Time Clock	Built-in			
Power Requirement (Intel 1.8 GHz with 1 GB memory)	Voltage	+3.3 V	+5 V	+12 V	-12 V
	Typical	4 A	4 A	< 12 mA	< 65 mA
	Maximum	4.2 A	6.2 A	< 20 mA	< 57 mA
Physical Characteristics	Dimensions (W x D)	233.35 x 160 mm (9.19" x 6.3"), 1-slot width			
	Weight	0.8 kg (1.76 lb)			
Environment	Temperature	Operating 0 ~ 65 °C (32 ~ 149 °F)		Non-Operating -40 ~ 70 °C (-40 ~ 140 °F)	
	Humidity	-			
	Shock	20 G		50 G	
	Vibration (5-500 Hz)	1.5 Grms		2.0 G	
	Altitude	60 m below sea level to 4000 m above sea level			
	Airflow	300 LFM=1.54 m/s			
Regulatory	Conformance	FCC Class A, CE			
	NEBS Level 3	Design for GR-63-core & GR-1089-core			
Compliance	PICMG 2.0 R3.0 CompactPCI Specification PICMG 2.1 R2.0 CompactPCI Hot Swap Specification PICMG 2.9 R1.0 CompactPCI System Management Specification PICMG 2.16 R1.0 CompactPCI Packet Switching Backplane Specification				

## Recommended Configurations

CPU Board	PMC Module	Rear I/O Board	Enclosure
MIC-3390E, MIC-3390-AE	MIC-3665-AE, MIC-3665-BE	RIO-3310AE, RIO-3310S-A1E, RIO-3310S-A2E	MIC-3039-BE, MIC-3056A/4-2RE, MIC-3038A/8-4RE, MIC-3041A/6-4RE, MIC-3041B/6-4RE, MIC-3042AE, MIC-3042A-AE, MIC-3042A-DE, MIC-3042BE, MIC-3042B-AE, MIC-3042B-DE, MIC-3043AE, MIC-3043A-BE, MIC-3043BE, MIC-3043B-BE, MIC-3043CE, MIC-3043C-BE, MIC-3043DE, MIC-3043D-BE, MIC-3081B/8-10AE, MIC-3081B-8/10RE

## Rear Transition Board


Part Number	Rear Panel							Onboard Header/Socket/Connector							Slot Width	
	KB & Mouse	COM2*	GbE LAN	VGA	USB	10/100 Base-T LAN	SCSI**	IDE	SATA	FDD	COM1	SCSI**	PRT	USB		Conn.
RIO-3310AE	1	1	2	1	1	1	-	1	1	1	1	-	1	1	J3/J5	1
RIO-3310S-A1E	1	1	2	1	1	1	-	1	1	1	1	1	1	1	J3/J5	1
RIO-3310S-A2E	1	1	2	1	1	1	1	1	1	1	1	-	1	1	J3/J5	1

\* Option for 3rd LAN from MIC-3390 but occupies the I/O for COM2

\*\* SCSI controller (Ultra 320) on board and optional for rear panel I/O out

## Ordering Information

Part Number	Front Panel I/O						Onboard Main Features					
	LAN	COM	PMC	USB	PMC	VGA	CPU	Memory	CF Socket	IDE Channel	Slot Width	IPMI BMC Module
MIC-3390E	2	1	1	2	1	1	-	-	1	2.5" SATA HDD	1	-
MIC-3390-AE	2	1	1	2	1	1	-	-	1	2.5" SATA HDD	1	1

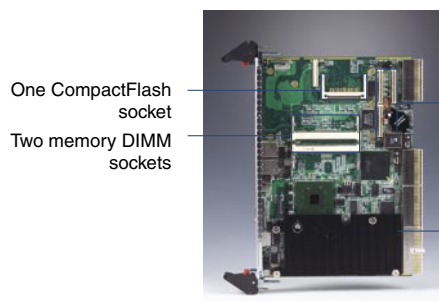

One CompactFlash socket  
Two memory DIMM sockets

One 64-bit/66 MHz PMC connector

One passive CPU heat sink



One PMC knockout

Two USB 2.0 ports

One RJ-45 COM1 port

Two RJ-45 Gigabit LAN port

One DB-15 VGA port