


Accessories

Small Form-factor Pluggable (SFP) Transceiver Modules

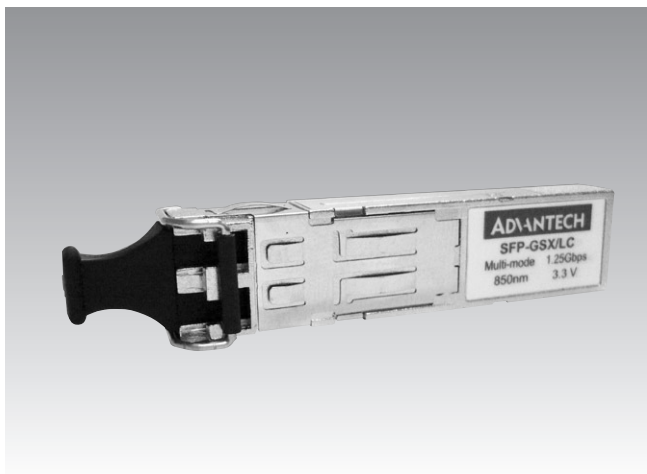

Features

- Industry standard small form pluggable (SFP) package
- Immovable lock Design
- Hot Pluggable
- Duplex LC connector
- Full duplex speeds support
- TTL signal detect indicator
- 3.3 V_{DC} power supply
- Industry leading EMI performance for high port density
- Class 1 laser product complies with EN 60825-1
- RoHS compliant

Introduction

Advantech's Small Form-factor Pluggable (SFP) transceiver family is available with a variety of different types, allowing users to select the appropriate transceiver for each link to provide the required optical reach over the available optical fiber type. Advantech's SFP transceiver immovable lock design can fix SFP module into the switch firmly. Besides Advantech's SFP transceiver's compact design provides high port density and compliant with Fast Ethernet and IEEE802.3z Gigabit Ethernet Standards. Advantech's SFP transceivers ensure your networks operate with maximum performance, reliability, and flexibility.

Specifications

Category	Distance	Model Name	Wave-length	Tx Power	Rx sensitivity	Link Budget
100Base-FX	M.M. (2 km)	SFP-FXM/LC	850 nm	-14dBm (min) ~ -20dBm (Max)	-31dBm (Max)	11dBm
	S.M. (30 km)	SFP-FXS/LC-30	1310 nm	-8dBm (min) ~ -15dBm (Max)	-34dBm (Max)	11dBm
1000Base	SX (550 m)	SFP-GSX/LC	850 nm	-4dBm (min) ~ -9.5dBm (Max)	-18dBm (Max)	19dBm
	LX (10 km)	SFP-GLX/LC-10	1310 nm	-3dBm (min) ~ -9.5dBm (Max)	-20dBm (Max)	19dBm
	LX (20 km)	SFP-GLX/LC-20	1310 nm	-2dBm (min) ~ -8dBm (Max)	-23dBm (Max)	19dBm
	LX (40 km)	SFP-GLX/LC-40	1310 nm	+1dBm (min) ~ -4dBm (Max)	-24dBm (Max)	20dBm

Ordering Information

- **SFP-FXM/LC** 100Base-FX Multimode SFP module
- **SFP-FXS/LC-30** 100Base-FX Single-mode SFP module
- **SFP-GSX/LC** 1000Base-SX Multi mode SFP module
- **SFP-GLX/LC-10** 1000Base-LX Single mode SFP module (10 km)
- **SFP-GLX/LC-20** 1000Base-LX Single mode SFP module (20 km)
- **SFP-GLX/LC-40** 1000Base-LX Single mode SFP module (40 km)

