


PCLD-8762

48-channel Relay Output Board

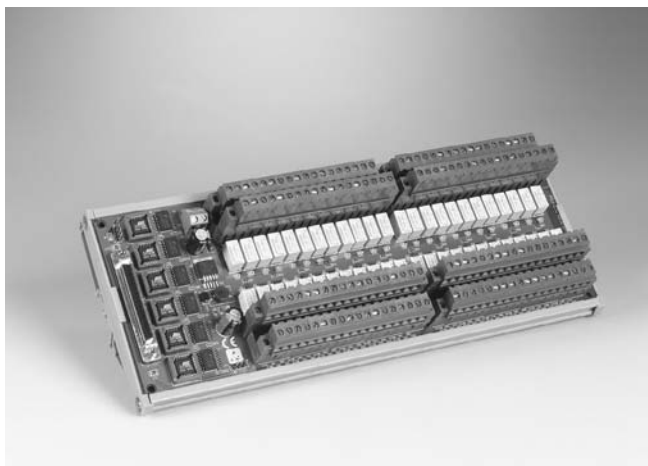

Features

- Built-in plug-in screw terminals for easier wiring
- LED status indicators for Relay output
- DIN-rail mounting
- On-board relay driver circuits

Specifications

Relay Output

- **Contact Rating** 30 V_{DC} @ 1 A, 120 V_{AC} @ 0.5 A
- **Contact Resistance** < 100 ohm
- **Electrical Endurance** 5*10⁴ times at 12 V/10 mA
- **Mechanical Endurance** 108 times
- **Operation Time** 5 ms Max
- **Release Time** 6 ms Max

General

- **Certifications** CE
- **Connectors** Controller: SCSI-68 (male)
Digital Input: Plug-in screw terminals: (#14 ~ 24 AWG)
- **Dimensions** 285 x 117 mm
- **Mounting** DIN 35 rail
- **Power Consumption** 7 V @ 1.8 A, 30 V @ 0.45 A

Ordering Information

- **PCLD-8762** 48-Channel I Relay (SPDT) output Board

1

Software

2

IPPC

3

TPC

4

FPM

5

ATM & AWS

6

DA&C

7

cPCI

8

ADAM-3000

9

Motion Control

10

ICOM

11

eConnectivity

12

UNO

13

ADAM-4000

14

ADAM-5000

15

ADAM-6000

16

ADAM-8000

17

BAS