

PCM-3618


PCM-3640/3641

PCM-3660


8-port RS-422/485 High-speed Module

4-port RS-232 High-speed Modules


Jumperless Ethernet Module

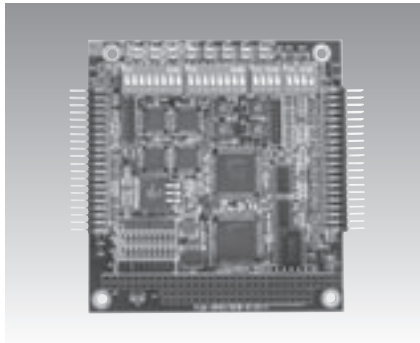

PCM-3618

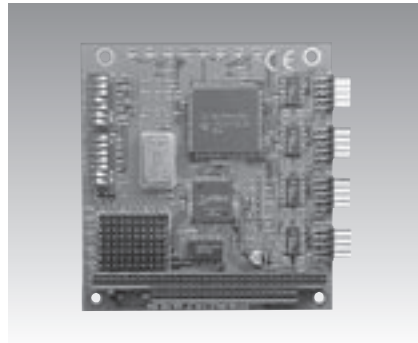

PCM-3640/3641

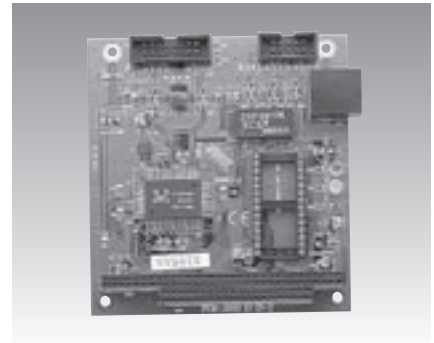

PCM-3660



Features

- Automatic RS-485 data flow control
- Shared IRQ settings for each ports
- LED indicators: TX, RX
- Supports Windows® 98/2000/XP
- Supports WinCE 4.2
- Powerful and easy-to-use utility (ICOM Tools)

Specifications

General

- Card Interface** PC/104
- Certifications** CE
- Connectors** 8 x DB9-M
- Ports** 8
- Power Consumption** +5 V @ 650 mA

Communications

- Data Bits** 5, 6, 7, 8
- I/O Address Range** 0 x 000 ~ 0 x 3F8
- IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- Parity** None, even and odd
- RS-422 Signal Support** TxD+, TxD-, RxD+, RxD-, CTS+, CTS-, RTS+ and RTS-
- RS-485 Signal Support** DATA+, DATA-, CTS+, CTS-
- Speed** 50 bps ~ 921.6 kbps
- Stop Bits** 1, 1.5, 2
- Termination Resistor** 120 Ω

Protection

- EFT Surge Protection** 1,000 V_{oc}

Environment

- Humidity (Operating)** 0 ~ 90 % RH
- Operating Temperature** 0 ~ 65° C (IEC-68-1-1, 2) (32 ~ 149° F)
- Storing Temperature** -25 ~ 80° C (-13 ~ 176° F)

Ordering Information

- PCM-3618-A** 8-port RS-422/485 High-Speed Module

Features

- Transmission speeds up to 460 kbps (PCM-3641)
- Shared IRQ settings for each of 4 RS-232 ports (PCM-3641)
- Standard PC ports: COM1, COM2, COM3, COM4 compatible
- Supports Windows 98/2000/XP
- Supports WinCE 3.0, 4.2
- Powerful and easy-to-use utility (ICOM Tools)

Specifications

General

- Card Interface** PC/104
- Certifications** CE
- Connectors** 4 x DB9-M
- Ports** 4
- Power Consumption** +5 V @ 200 mA (Typical); +5 V @ 250 mA (Max.)

Communications

- Data Bits** 5, 6, 7, 8
- Data Signals** TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
- I/O Address Range** 0 x 0200 ~ 0 x 03F8
- IRQ** 3, 4, 5, 6, 7, 9, 10, 11, 12, 15
- Parity** None, even and odd
- Speed** 50 bps ~ 460.3 kbps (PCM-3641) 50 bps ~ 115.2 kbps (PCM-3640)
- Stop Bits** 1, 1.5, 2

Environment

- Humidity (Operating)** 0 ~ 90 % RH
- Operating Temperature** 0 ~ 65° C (32 ~ 149° F) (IEC-68-1-1, 2)
- Storing Temperature** -25 ~ 80° C (-13 ~ 176° F)

Ordering Information

- PCM-3640-A** 4-port RS-232 Module
- PCM-3641-A** 4-port RS-232 High-speed Module

Features

- Automatically detects 8-bit or 16-bit
- AUI connector supports external MAUs
- Onboard 32 KB buffer for multi-packages

Specifications

General

- Boot ROM Address** C0000, C8000, D0000, or D8000H
- Card Interface** PC/104
- Certifications** CE
- Connectors** 1 x PC/104 stackthrough 1 x 10Base-T (RJ-45) 1 x 16-pin insulation displacement connector for AU1
- Power Consumption** +5 V @ 400 mA max

Communications

- Data Bus** 8-bit, 16-bit, or auto-sending
- I/O Address** 200, 220, 240, 260, 280, 2A0, 2C0, 300, 320, 340, 380, 3A0
- IRQ** 3, 4, 5, 9, 10, 11, 12 or 15
- Standard** IEEE 802.3 10 Mbps CSMA/CD 10Base-T Transceiver

Ordering Information

- PCM-3660-C1** Jumperless Ethernet Module