TPC-651H

5.7" VGA TFT LCD Intel[®] Atom[™] **Touch Panel Computer with Wide Operating Temperature**



Features

- Intel® Atom[™] processor (up to 1.33 GHz)
- 5.7" VGA TFT LCD
- -20 ~ 60° C wide operating temperature
- Compact design with die-cast Al alloy front bezel
- Fanless cooling system
- NEMA4/IP65 compliant front panel
- Supports Microsoft[®] Windows XP/XPe/CE
- Dual Gigabit Ethernet supported
- Isolation Protection for Serial ports
- Energy Star approval

Introduction

With a high quality TPC product line, TPC extends its Touch Panel Computer family with Intel® Atom M platform for 5.7", 12.1" & 15". TPC-651H is designed with Intel® Atom M eMenlow XL processor as its core. The Intel Atom has low power consumption and wide operating temperature. This system is fanless, slim design and the front bezel is die-cast Al alloy material. This product also provides a -20~60° C wide operating temperature solution and complete isolation protection for its serial ports. TPC-651H series are durable and reliable platform.

Specifications

General

BIOS	Award [®] 4 MB	 Display Type
 Certifications 	BSMI, CCC, CE, FCC, UL	 Display Size
Cooling System	Fanless design	Max. Resolution
Dimensions (W x H x	D) 195 x 148 x 58 mm (7.68" x 5.83" x 2.28")	Max. Colors
 Enclosure 	ABS and ABS + PC	Luminance cd/m ²
 Mounting 	Panel Mount	 Viewing Angle (H/V°)
 OS Support 	Windows XP/XPe/CE	 Backlight Life
	Linux	 Contrast Ratio
 Power Consumption 	17 W (typical)	
Power Input	18 ~ 32 V _{DC}	Touchscreen
 Watchdog Timer 	1 ~ 255 sec (system)	 Lifespan
 Weight (Net) 	1.43 kg (3.15 lb)	 Light Transmission
		 Resolution
System Hardware		 Type
 CPU 	Intel Atom 1.33 GHz	
 Chipset 	eMenlow XL + Poulsbo	Environment
 Memory 	1GB SO-DIMM DDR2 667 SDRAM	 Humidity
	Up to 2GB (One channel)	Ingress Protection
- LAN	10/100/1000Base-T x 2	 Operating Temperatu
 Storage 	CompactFlash [®] slot x 1	 Storage Temperature
 I/O 	RS-232 x 1 (with isolation)	 Vibration Protection

I/U

Fanless Industrial Panel Computers

RS-422/485 x 1 (with isolation)

USB 2.0 x 2 (Host)

LCD Display

- VGA TFT LCD
 - 5.7"

262 K 700

- 640 x 480
- 160/140 ')
- 50,000 hrs
- 800:1
 - - 5-wire, analog resistive
- - - (Operating, random vibration)

Front panel: NEMA4, IP65


10~95% RH @ 40° C, non-condensing

1 million touches at single point

- Above 75% Linearity

- - **ure** -20 ~ 60° C (-4 ~ 140° F)
 - e -20 ~ 60° C (-4 ~ 140° F)

TPC-651H

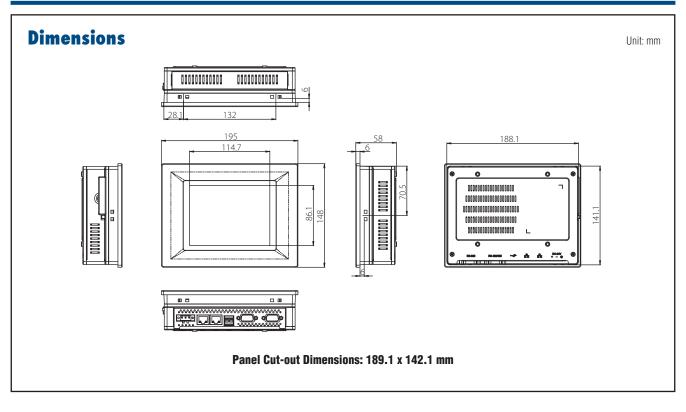

Ordering Information

- TPC-651H-Z2AEPWR-247-AE
- 5.7" VGA Touch Panel PC, Atom Z520 1.33 GHz,1 GB 24 V 50 W AC-DC Power Adapter

Rear View

