
	TECHNICAL DATA SHEET	code	9501NH
		version	3
		date	2005-11-03
	9501NH	page	1/2

APPLICATION

Instrumentation and computer cable for EIA RS-232 data transmission applications.

CONSTRUCTION

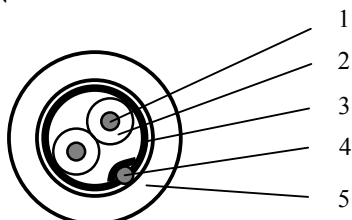

1. Conductor	AWG24 (7xAWG32) tinned Cu
2. Insulation	
Material	PE
Diameter over insulation	1.12 ± 0.05 mm
Colour of insulation	Black and red
3. Foil (Beldfoil®)	
Material	Aluminium / Polyester
Thickness	9 / 12 µm
4. Drainwire	AWG20 (7xAWG28) tinned Cu
5. Sheath	
Material	FRNC (UV stabilised)
Colour	Chrome (like RAL 7037)
Thickness of sheath	0.90 ± 0.07 mm
Diameter over sheath	4.15 ± 0.25 mm


REQUIREMENTS AND TEST METHODS

Electrical:

Nominal resistance conductor	78.7 Ω/km
Nominal resistance shield	59.1 Ω/km
Nominal capacitance conductor to conductor	131.2 pF/m
Nominal capacitance conductor to shield + other cond.	242.8 pF/m
Nominal inductance between conductors	0.62 µH/m
Testvoltage conductor-conductor	2500 VDC, 3 seconds
Testvoltage conductor-screen	2500 VDC, 3 seconds
Voltage rating	300 V RMS
Maximum continues current per conductor @ 25 °C	2.2 A

Mechanical and physical:

Flame resistance	IEC 332-3C
Oil resistance	ASTMD741
Radiation resistance	IEC544 (CERN)
Application specification	BS 7655 section 6.1 table 1, LTS 3
Temperature range installing	-15 to +80 °C
Temperature range operating (moving installation)	-15 to +80 °C

	TECHNICAL DATA SHEET		code	9501NH
			version	3
			date	2005-11-03
	9501NH		page	2/2

Temperature range operating (fixed installation)	-45 to +80 °C
Temperature range storage	-45 to +80 °C
Minimum bending radius	10 x cable diameter
Maximum pulling tension	50 N

MARKING

Colour code 2951: chrome sheath with text 'BELDEN V 9501NH 1PR 24AWG SHIELDED LSNH IEC 332-3C'

PACKAGING

On non-returnable reels with a length of 305 m (-0, +10%) or on non-returnable reels with a length of 500 m (-0, +10%) or on non-returnable reels with a length of 1000 m (-0, +10%).

Each reel is labelled with the following data:

Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.