

HPC-7280

2U Rackmount Chassis for EATX Serverboard with 8 Hot-swap Hard Drive Cages

NEW



CE FCC 

Features


- 2U rackmount chassis supports ATX/CEB/EATX motherboard
- Lockable front bezel prevents unauthorized access
- 800 W (1+1) redundant power supply
- Supports 2 x PCI-X and 1 x PCIe x8 through riser card

Specifications

Processor Support	Supports dual, single Intel / AMD processors		
Form Factor Support	2U chassis support for max. motherboard size - 12" x 13" EATX		
Expansion Slots	3 x Full-height, Full-length (with riser card) or 6 x low profile PCI expansion slots		
Drive Bay	Slim ODD Bay	1	
	5.25" (front-accessible)	-	
	3.5" (front-accessible)	8	
	3.5" (internal)	-	
	2.5" (front-accessible)	-	
Cooling	2.5" (internal)	-	
	Chassis Fan	3 (8 cm / CFM)	
	Air Filter	-	
System Monitoring	Chassis intrusion switch		
Front I/O Interface	USB	1	
	PS/2	-	
Miscellaneous	LED Indicators	Power, HDD activity, LAN	
	Rear Panel	-	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40° C (32 ~ 104° F)	-40 ~ 70° C (-40 ~ 158° F)
	Humidity	10 ~ 85% @ 40° C non-condensing	10 ~ 95% @ 40° C, non-condensing
	Vibration (5-500 Hz)	1 Grms	2 G
	Shock	10 G	30 G
		(with 11 ms duration, half sine wave)	
Physical Characteristics	Dimensions (W x H x D)	482.6 x 88 x 700 mm (2U)	
	Weight	28 kg	

Dimensions

Unit: mm (inch)

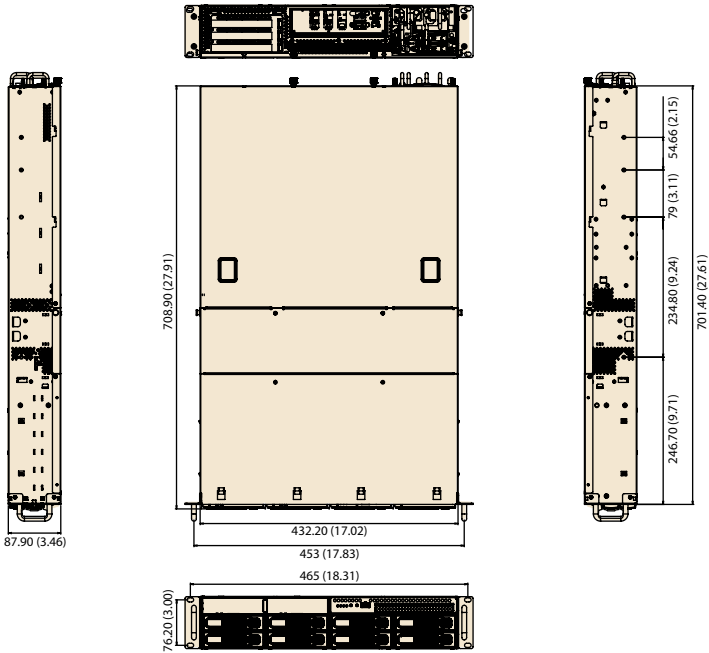

Ordering Information

Part Number	Power Supply
HPC-7280-R8A1E	1+1 800 W Redundant Power Supply

Packing List

Description	Quantity
800W Redundant Power Supply Module	x 2
Hot-swap 3.5" HDD Trays	x 8
SAS/SATA2 Backplane	x 2
PCI Riser Card (SRC-2LG2XE-00A1E)	x 1
Front I/O Panel Board	x 1
Front Bezel with Key (Lockable)	x 1
Redundant Power Supply Power Distribution Board	x 1
System Fans (80 mm x 38 mm)	x 3
System Cable Set	x 1
Startup Manual	x 1

Front View



Rear View



Interior View

