

UNO-FPM11

UNO & FPM Integration Kit

Packing List

Before installation, please make sure that you have:

- Small PE bag with screws
- UNO and FPM integration kit
- VESA mount convert bracket
- This (Startup) manual

If anything is missing or damaged, contact your distributor or sales representative immediately

Overview

UNO-FPM11 provides excellent integration with UNO & FPM models, which helps make installation easier and saves space in the field.



Supported Model List

- UNO Models: UNO-11XX Series
- FPM Models: FPM 12", 15", 17", & 19" Models

Notes

For more information on this and other Advantech products, please visit our websites at:

<http://www.advantech.com/eAutomation>

For technical support and service:

<http://www.advantech.com/support/>

This startup manual is for UNO-FPM11

Part No. 2003117020

1st Edition


July 2009

Installation


1. Make sure both the FPM and UNO system are powered off and all power cables are removed.
2. Put the integration kit on the back of the FPM, then make sure the arrow sign on the integration kit is pointed to the top of FPM.

Model Supported	Screw spec	Advantech Screw P/N	Qty
FPM-2150G, FPM-3120G, FPM-3121G, FPM-3171G	M5X10	1930000502	8
FPM-3150G, FPM-3191G, FPM-5151G, FPM-5171G	M4X10	1930000501	8


3. Loosen four screws on UNO but do not remove the aluminium bracket.



4. Combine the UNO with the VESA mount convert bracket and attach with screws (p/n: 1930001643)



5. Attach the integration kit on FPM using screws according to the table below (p/n: 19330306A0)

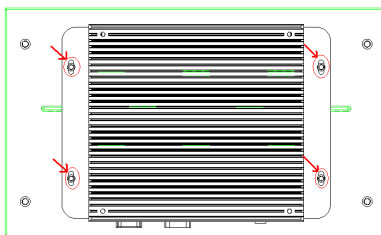

UNO and FPM Integration Kit

