

# ACP-4340

## 4U Rackmount Chassis for Full-size SHB/SBC or ATX/MicroATX Motherboard with 4 Hot Swap Drive Trays

**NEW**



### Features

- Supports a PICMG backplane with up to 14 slots or an ATX/Micro-ATX motherboard
- Shock-resistant disk drive bay holds four hot-swap 3.5" and 2.5" SAS/SATA disk trays, one slim optical disk drive, and one 2.5" internal drive
- Dual front USB 3.0 ports
- Front-accessible system fan without opening top cover for easy maintenance
- LED indicators and alarm notification for system fault detection
- Smart fan speed control
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

Quiet


CE FCC RoHS

### Specifications

		External	Internal
Drive Bay	Slim Optical Drive Bay	1	-
	3.5" Drive Bay	-	-
	2.5" Drive Bay	-	1
	Hot Swap	4	-
Cooling	Fan	1 (12 cm /74 CFM) + 1 (8 cm/56 CFM) for SAS/SATA storage unit	
	Air Filter	Yes	
Front I/O Interface	USB 3.0*	2	
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1, and LAN2	
	Rear Panel	Backplane version: One 9-pin D-Sub opening Motherboard version: Five 9-pin D-Sub and one 68-pin SCSI openings	
Intelligent System Module Remote Monitoring	CPU/System fan speed , CPU/System temperature , motherboard voltage (Only selected Advantech MBs/CPU cards with SUSIAccess installed can fully enable these functions, check with Advantech local rep. for detailed information.)		
Environment	Temperature	Operating 0 ~ 40° C (32 ~ 104° F)	Non-Operating -40 ~ 70° C (-40 ~ 156° F)
	Humidity	10 ~ 95% @ 40° C, non-condensing	
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	
	Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 478 mm (19" x 7.0" x 18.8")
	Weight	12.5 kg (27.5 lb)	


\* The USB ports do not operate normally if a main board with USB 2.0 internal connector only is installed.

### Front View

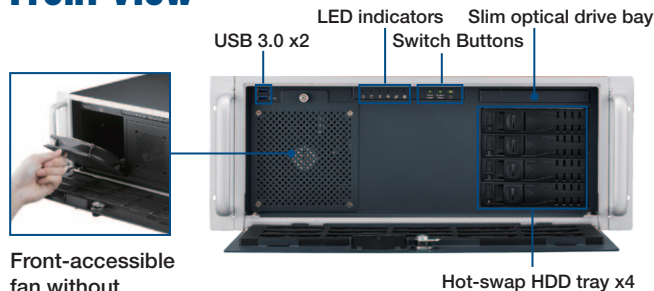

Front-accessible fan without opening top cover

### Inside View

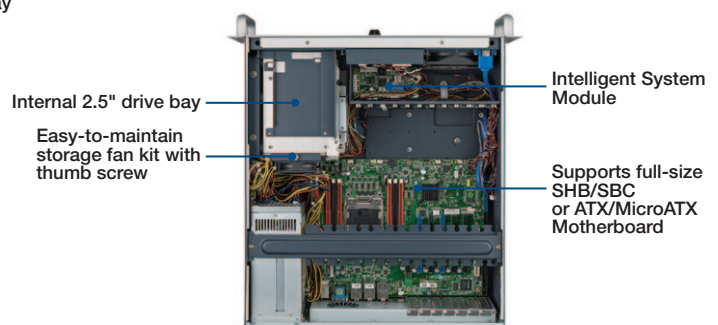


### Rear View



\*Note: Backplane, SBC, motherboard, and power supply are not included.

## Dimensions

Unit: mm [inch]

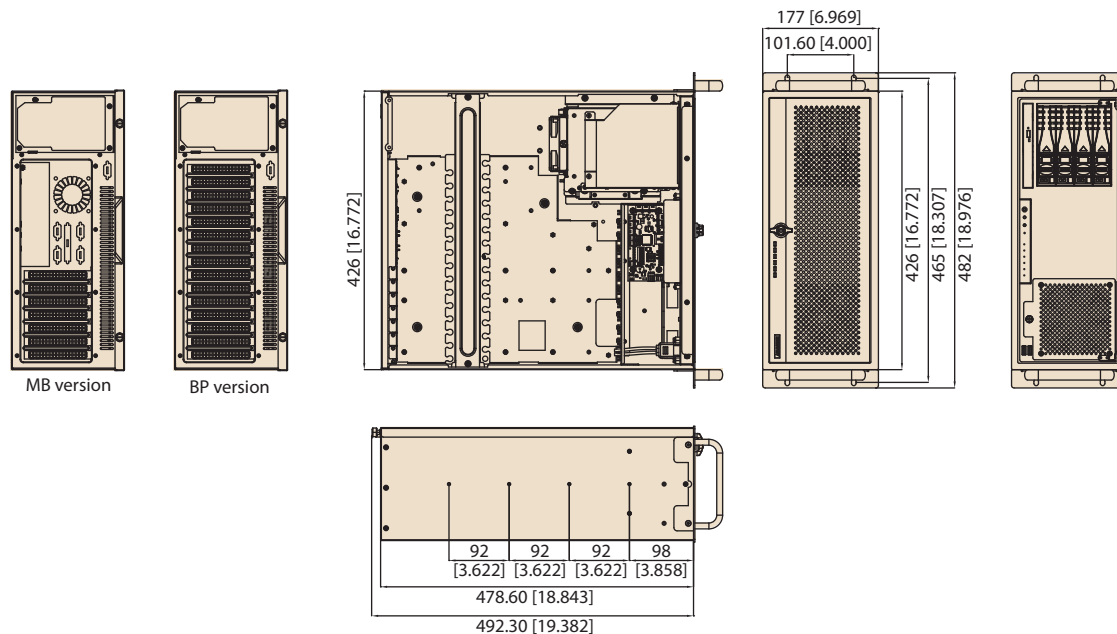

## Ordering Information

Part Number	Description
<b>Backplane Version</b>	
ACP-4340BP-00XE	Without PSU, with ATX switch
<b>Motherboard Version</b>	
ACP-4340MB-00XE	Without PSU, with ATX switch

## Optional Accessories

Part Number	Description
96CB-SATAPOWER-6P1	SATA power wire 6-pin to big 4-pin (for slim ODD)

## Spare Parts

Part Number	Description
9662132020E	Black mobile HDD tray
1990021256T000	Door filter

## Power Supply Options

Part Number	80 Plus Grade	Watts	Type	Input
PS8-400ATX-ZE	Bronze	400W	Single	AC 100 ~ 240 V (full range)
PS8-500ATX-ZE	Bronze	500W	Single	AC 100 ~ 240 V (full range)
PS8-700ATX-ZE	Bronze	700W	Single	AC 100 ~ 240 V (full range)
RPS8-500ATX-XE	Bronze	500W	1+1 Redundant	AC 100 ~ 240 V (full range)